GO FAN YOURSELF
Innovative Air Movement for Healthy Spaces

1032 National Parkway
Schaumburg, IL 60173

1-847-648-4920
www.gofanyourself.com

Scan me

MADE IN THE USA
From domestic and foreign parts

SPECIFICATIONS RAY-AIR LIT

Ray-Air LIT Dimensions (nominal)

- 2x2 Wall mount
  - 23-3/4" x 23-3/4" x 3-5/16" 12lbs
- 2x4 Wall mount
  - 23-3/4" x 47-3/4" x 3-5/16" 22lbs
- 2x2 Surface/Rigid mount (assembled)
  - 23-3/4"x 23-3/4" x 4" (8-3/8") 10lbs
- 2x4 Surface/Rigid mount (assembled)
  - 23-3/4"x 47-3/4" x 4" (8-3/8") 20lbs
- 2x2 Ceiling and suspended mounts
  - 23-3/4"x 23-3/4" x 4" 10lbs
- 2x4 Ceiling and suspended mounts
  - 23-3/4"x 47-3/4" x 4" 20lbs

Power Consumption Air Movement Only (nominal)

- 2x2 = Nominal 6 watts
- 2x4 = Nominal 11 watts

This means your 2X4 Ray-Air
(Air Movement Only) unit costs you:
$0.10 per kWhr = **$9.64 Annually!!**
$0.16 per kWhr = **$15.42 Annually!!**

Rated CFM (nominal)

Axial Fans rated for a nominal 60 CFM

- 2x2 Ray-Air - nominal 120 CFM
- 2x4 Ray-Air - nominal 240 CFM

Measured Output CFM (nominal)

- 2x2 Ray-Air - Nominal 80 CFM
- 2x4 Ray-Air - Nominal 160 CFM

Anti-Microbial Paint

https://www.biocote.com/partners/akzo-nobel/

- Covers all aluminum components including the shell and internal support structure.

Aluminum Shell & Support Structure

18 ga. 5052-H32 alloy

- Provides the largest heat sink in the industry maximizing the life of all electronic components.

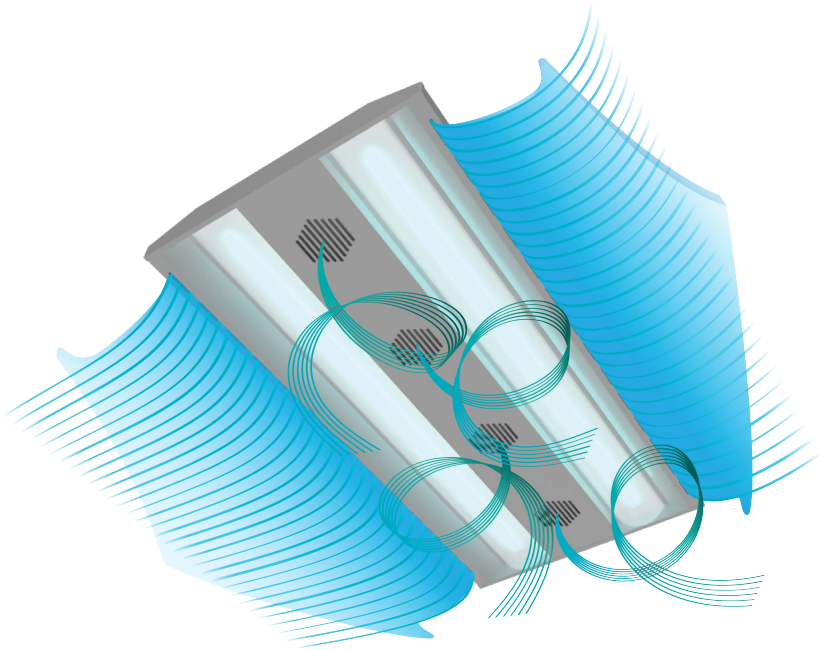

Universal Voltage - 120-277VAC

Available Kelvin Temperatures:

5000
4000
3500

Lumen Packages and Total Wattage Table*

Size	Lumens	Total Watts
2x2	2,000	28
	3,000	32
	4,000	44
2x4	3,000	37
	4,000	45
	5,000	54
	6,000	63

* Total wattage is the total wattage for the Ray-Air unit. Air Movement Wattage + Lighting Wattage

> Zero Mercury
> UL Tested & DLC Approved